


CHARGING 12V AUXILIARY BATTERY

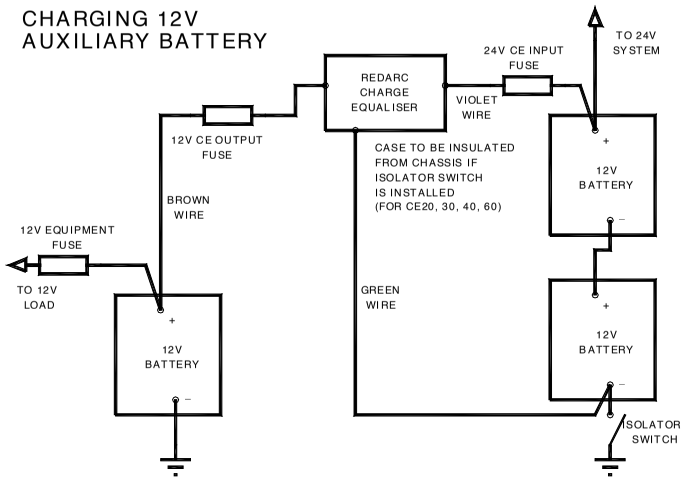


CHARGING DUAL 12V AUXILIARY BATTERY

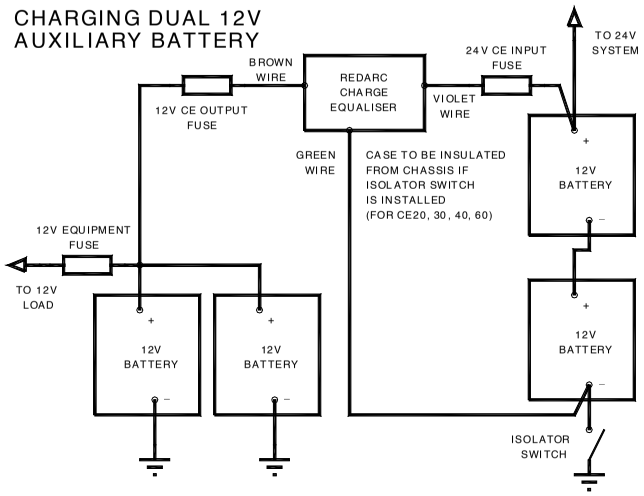


CONNECTION USING REDARC VOLTAGE SENSOR AND ALARM

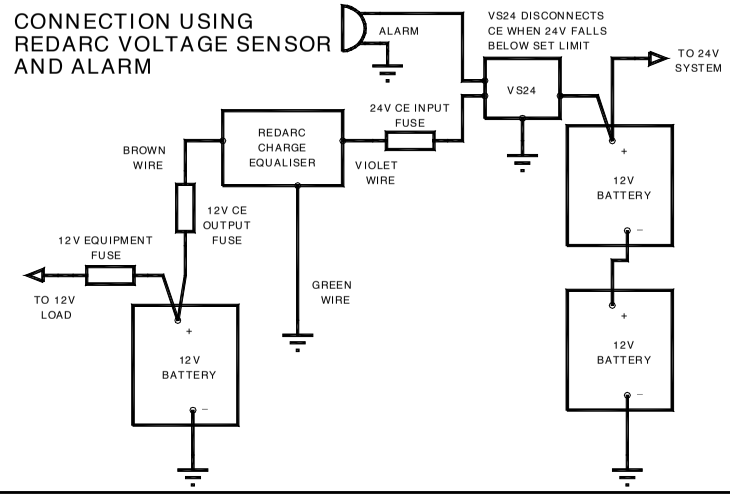


VARIATIONS USING RELAYS

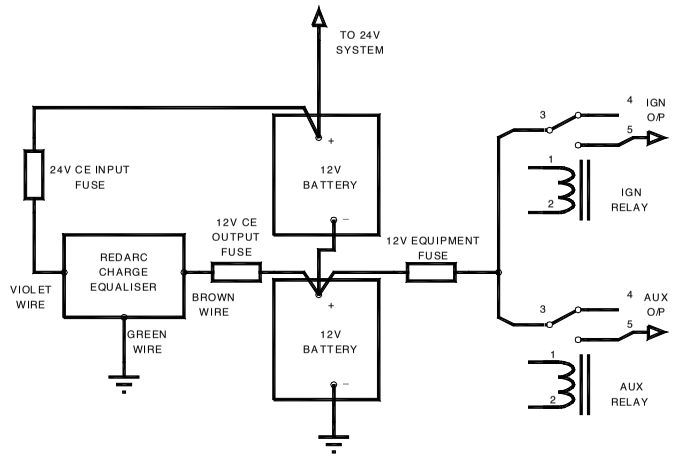


STANDARD CONNECTION

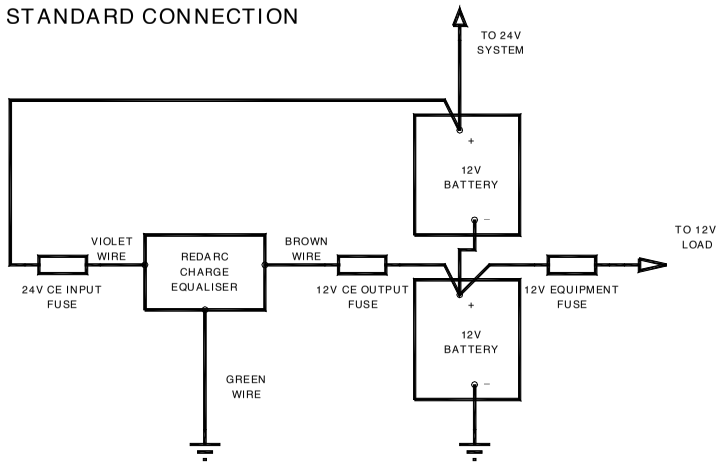

ALTERNATIVE CONNECTIONS

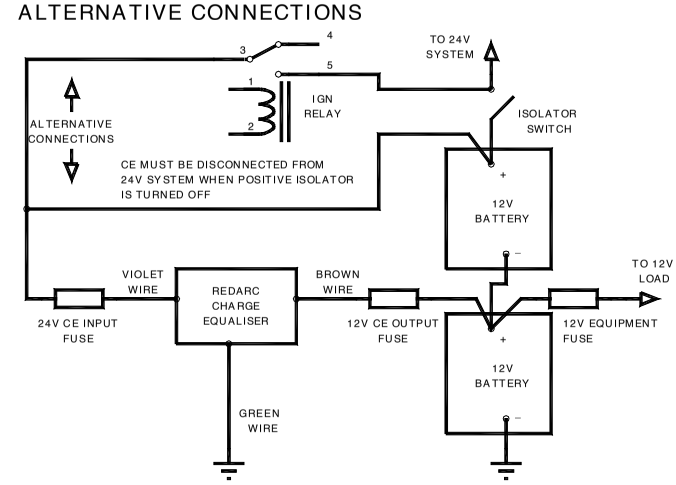

CONNECTION FOR TRUCK FITTED WITH ISOLATOR SWITCH IN BATTERY NEGATIVE/GROUND

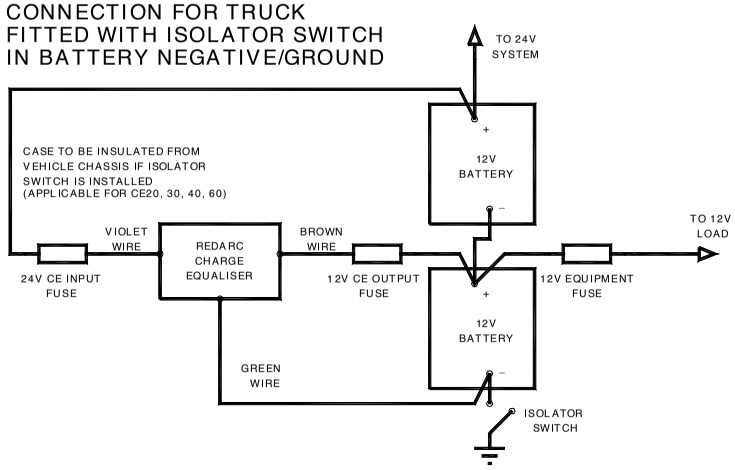

CONNECTION FOR TRUCK FITTED WITH ISOLATOR SWITCH IN BATTERY NEGATIVE/GROUND WITH IGNITION RELAY

