


FRAME DIMENSION

(Three-Dimensional Distance)

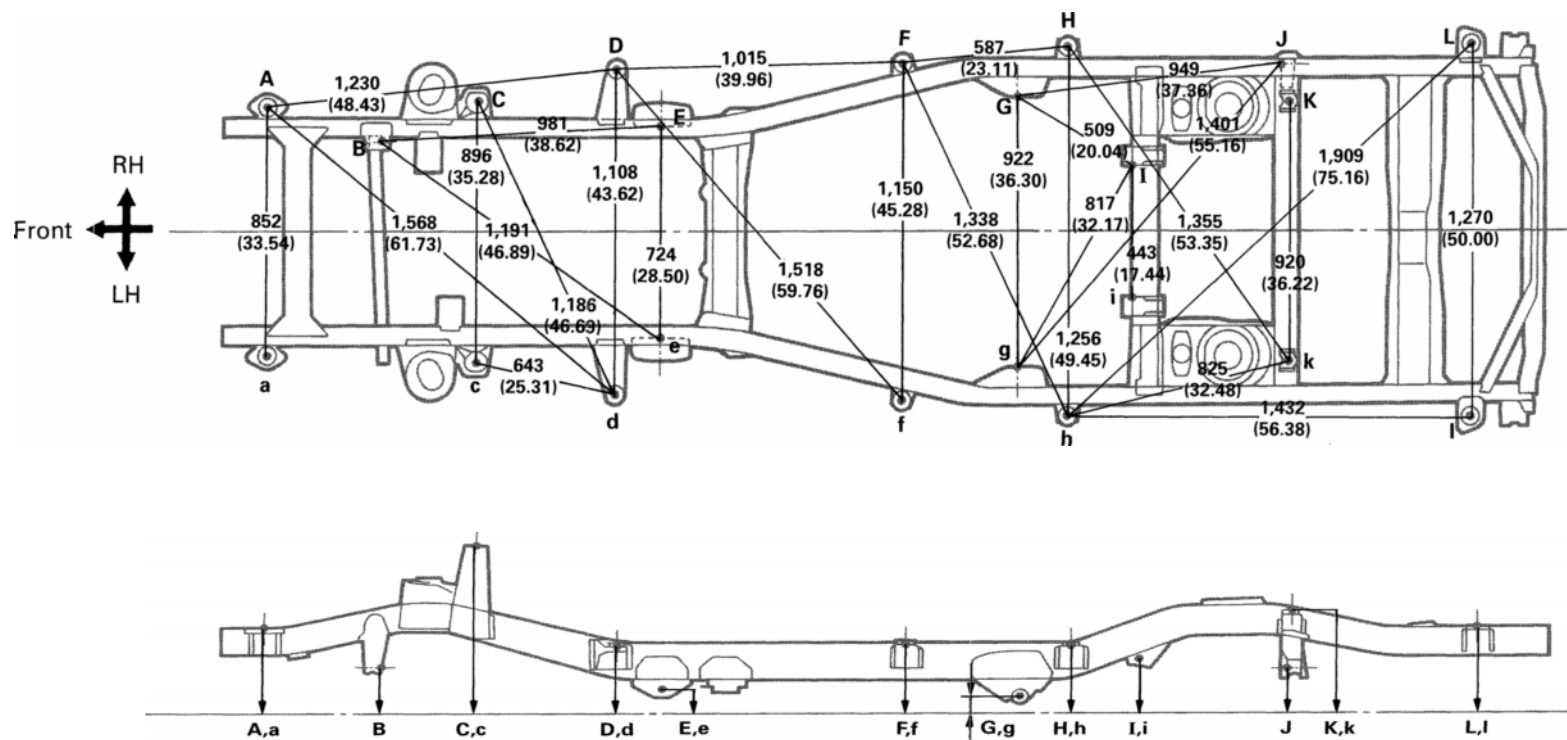


HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear.)

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	60 (2.36)	G, g	Lower control arm installation hole-inner	18.5 (0.728)
B	Lateral control rod installation hole-rear	18.5 (0.728)	H, h	Body mounting hole	24 (0.94)
C, c	Shock absorber installation hole	24 (0.94)	I, i	Upper control arm installation hole-inner	18.5 (0.728)
D, d	Body mounting hole	28 (1.10)	J	Lateral control rod installation hole-front	16.5 (0.650)
E, e	Leading arm installation hole-inner	18.5 (0.728)	K, k	Body mounting hole	22 (0.87)
F, f	Body mounting hole	24 (0.94)	L, l	Body mounting hole	60 (2.36)

FRAME DIMENSION (Cont'd)

(Two-Dimensional Distance)

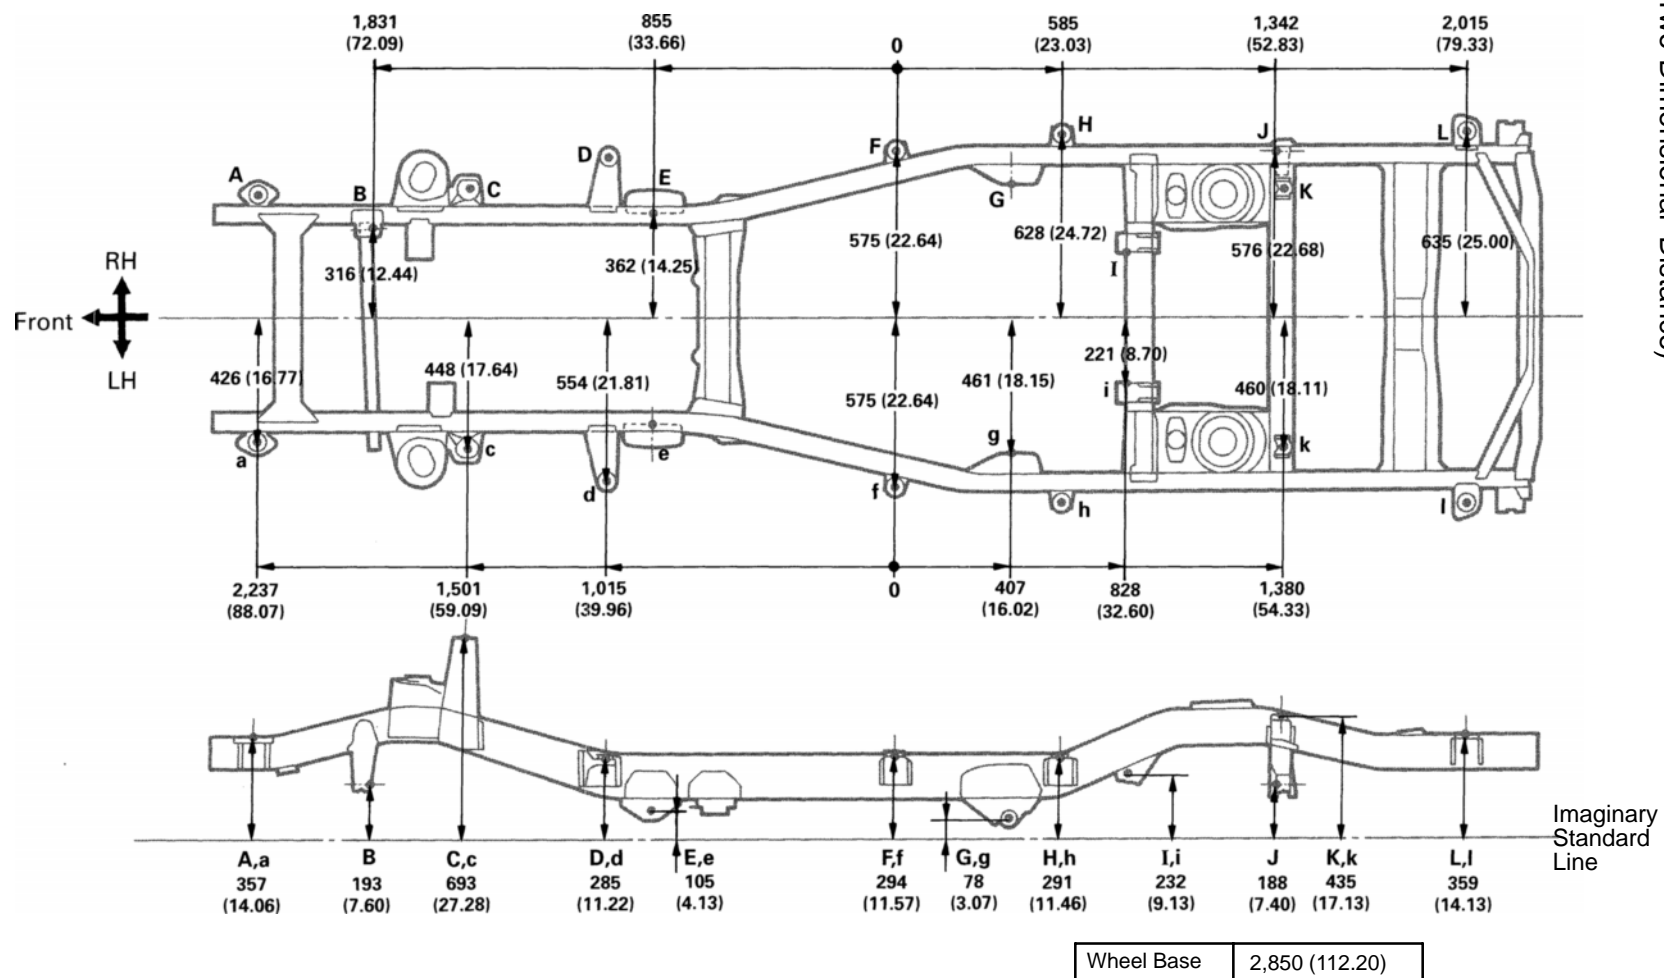

HINT: For symbols, capital letters indicate right side of vehicle, small letters indicate left side of vehicle (Seen from rear).

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Body mounting hole	60 (2.36)	G, g	Lower control arm installation hole-inner	18.5 (0.728)
B	Lateral control rod installation hole-rear	18.5 (0.728)	H, h	Body mounting hole	24 (0.94)
C, c	Shock absorber installation hole	24 (0.94)	I, i	Upper control arm installation hole-inner	18.5 (0.728)
D, d	Body mounting hole	28 (1.10)	J	Lateral control rod installation hole-front	16.5 (0.650)
E, e	Leading arm installation hole-inner	18.5 (0.728)	K, k	Body mounting hole	22 (0.87)
F, f	Body mounting hole	24 (0.94)	L, l	Body mounting hole	60 (2.36)